

PM100FG

DC Brush Motor



● General information

- ▶ IEC34-1 Standard Flange
- ▶ Magnet material: Hard Ferrite
- ▶ Number of Poles: 4
- ▶ Insulation class B, higher insulation on request
- ▶ Suitable for low voltage battery-operated application


● Specifications

SPECIFICATION		PM100FG100	PM100FG200	PM100FG300
Voltage	(V)	48	48	48
No Load Speed	(RPM)	3600	3600	3600
Rated Torque	(Nm)	0.9	1.6	2.1
Rated Speed	(RPM)	3100	3100	3100
Rated Current	(A)	8.5	15	19
Stall Torque	(Nm)	8	20	28
Rotor Inertia	(Kg.cm ²)	7	14	18
Ke	(V/KRPM)	12	12	12
Torque Constant	(Nm/A)	0.115	0.115	0.115
Resistance	(OHMS)	0.6	0.23	0.17
Weight	(Kg)	3.8	4.3	5
L	(mm)	125	158	178

PM100FG

DC Brush Motor

● Mechanical

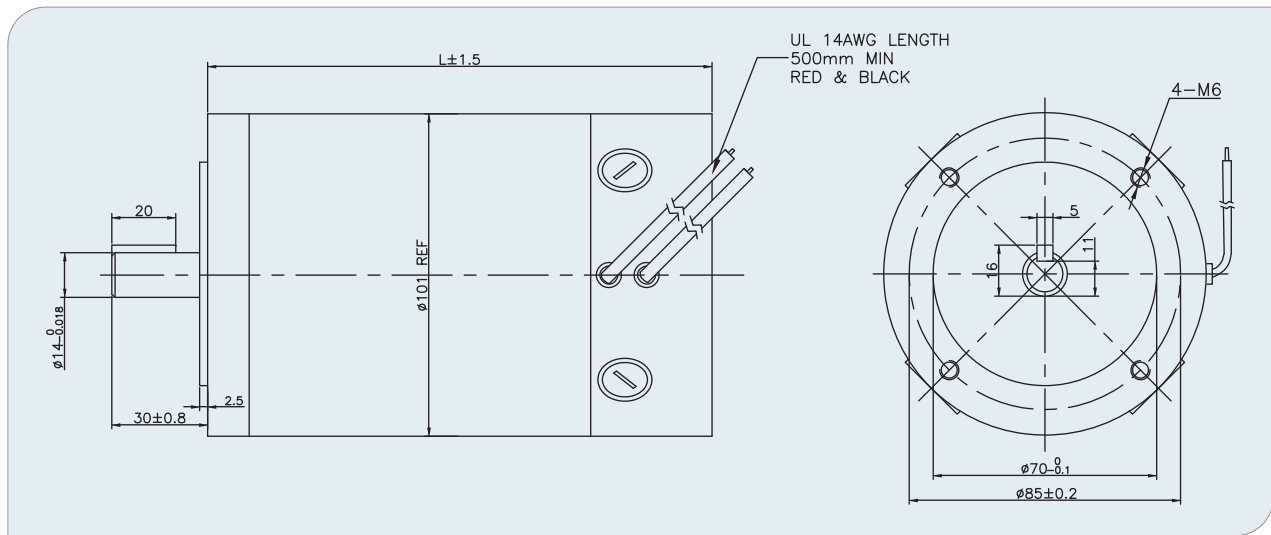

● Characteristic diagram

